


ADJUSTABLE ROOF FLASHINGS



FAMCO



Helps provide weather tight pipe penetrations of the roof.

- Adjustable to fit slope of roof.
- No field trimming required.
- Helps provide proper alignment of pipe.
- All weatherproof seams.
- Heavy gauge galvanized construction.
- Large flanges.
- Helps provide waterproof roof penetrations.
- Half sizes available for Gas Vent Pipe.
(i.e., order 4 1/2 for 4" gas vent pipe)




FRESH AIR MANUFACTURING CO.

Technologies in Ventilation

649 N. Ralstin St., Meridian, Idaho 83642 (208)884-8931 1-800-234-1903 FAX (208)884-8943

ADJUSTABLE ROOF FLASHINGS




FAMCO


OPTIONS:

Available in Galvanized Steel, Aluminum, Stainless Steel and Copper.

Roof Flashings Selection Guide				
G Dimension	Zero to 6/12 Pitch	Zero to 8/12 Pitch	Steep Pitch 7/12 to 12/12	Flat Pitch
3"		G 3	GH 3	FP 3
4"		G 4	GH 4	FP 4
5"		G 5	GH 5	FP 5
6"		G 6	GH 6	FP 6
7"		G 6	GH 7	FP 7
8"		G 8	GH 8	FP 8
9"	G 9		GH 9	FP 9
10"	G 10		GH 10	FP 10
12"	G 12		GH 12	FP 12
14"	G 14		GH 14	FP 14
16"	G 16		GH 16	FP 16
18"	G 18		GH 18	FP 18

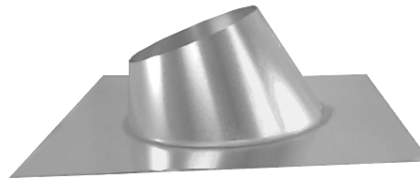



G Style (standard pitch)

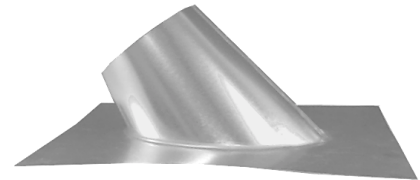

GH Style (steep pitch)



FP Style (flat pitch)

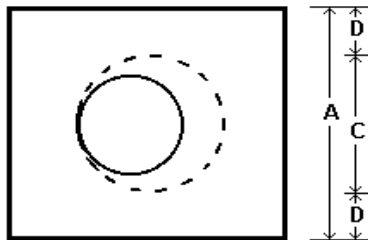

G Style Flashing										
Size	A	B	C	D	E	F	G	H	I	J
3"	15	15	5.5	4.75	5.5	4.75	3	4.75	7.25	3
4"	15	15	6.5	4.25	6.5	4.25	4	4.25	6.75	3
5"	16	16	8	4	8	4	5	4	7	3
6"	18	18	9.5	4.25	9.5	4.25	6	4.25	7.75	4
7"	20	20	10.5	4.75	10.5	4.75	7	4.75	8.25	4
8"	20	20	12	4	12	4	8	4	8	4
9"	20	20	12.5	3.75	12.5	3.75	9	3.75	7.25	4
10"	22	22	13.5	4.25	13.5	4.25	10	4.25	7.75	4
12"	24	24	16	4	16	4	12	4	8	5
14"	30	30	19	5.5	19	5.5	14	5.5	10.5	5
16"	34	34	20.5	6.75	20.5	6.75	16	6.75	11.25	6
18"	34	34	23.5	5.25	23.5	5.25	18	5.25	10.75	6

3" thru 7" is 28 Ga. Galvanized Steel
8" and up is 26 Ga. Galvanized Steel



FRESH AIR MANUFACTURING CO.

Technologies in Ventilation